



100.1170 | Floor Mounted Tub Filler With Hand Held Shower



- · Solid Brass construction includes valve
- Floor Mount Installation
- Hand shower flow rate = 2.0 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 9.0 GPM spout flow rate.
- Single Lever allows both volume and temperature control
- With swivel spout

FINISHES :

Chrome - 100.1170CP, Brushed Nickel - 100.1170BN

STANDARDS:

• ASME A112.18.1 / CSA B125.1


Legislation Compliance

ZeroDrip Technology





Technical Diagram

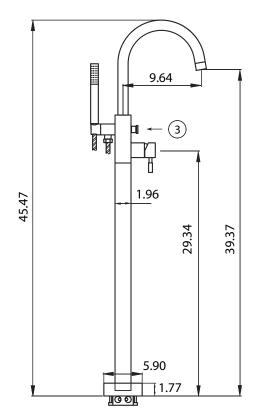



Part Number Guide:

- (1) Cartridge 100.1170-9853
- 2 Aerator 100.1170-2364
- (3) Push / Pull Diverter 100.1170-1991CP Chrome - 100.1170-1991BN - Brushed Nickel

