




**160.1167 | Floor Mounted Tub Filler With Hand Held Shower**

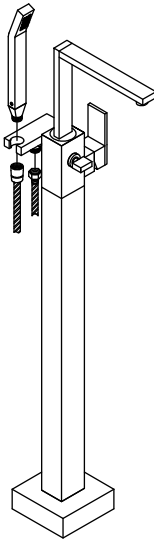

**SPECIFICATIONS:**

- Solid Brass construction - includes valve
- Floor Mount Installation
- Hand Shower Flow Rate = 2.0 GPM @ 60 PSI w/ back flow prevention
- Diverter knob controls water flow between spout and hand held
- 7.0 GPM Spout Flow Rate.
- 360° Swivel Spout

**FINISHES :**

- Chrome - 160.1167CP, Brushed Nickel - 160.1167BN

**STANDARDS:**

- ASME A112.18.1 / CSA B125.1


Legislation Compliance



ZeroDrip Technology



**Technical Diagram**

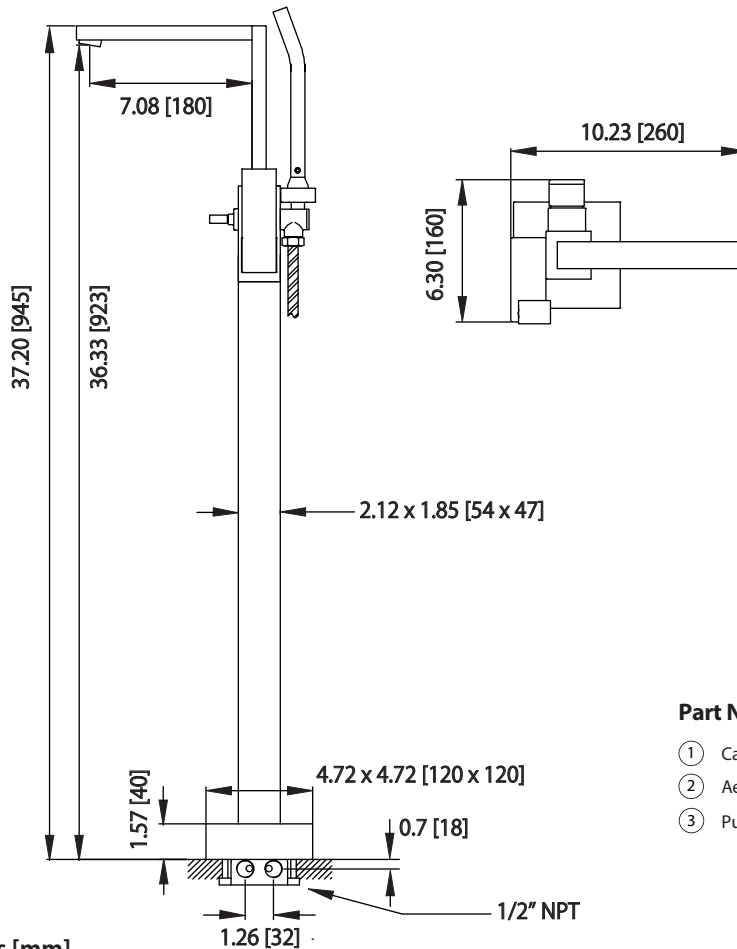

**Part Number Guide:**

- ① Cartridge - 100.1000-9853
- ② Aerator - 160.2410-2364
- ③ Push / Pull Diverter - 160.1167-1991CP - Chrome  
- 160.1167-1991BN - Brushed Nickel