

## QUANTUM™ LIGHTED MIRROR



The Quantum™ Lighted Mirror combines a polished edge with a single stream of light radiating through frosted glass, for an urban and modern statement.

### FEATURES

- E-Life™—8 Years Extended Lamp Replacement Cycle
- Natural Light Color
- HardCoat™ Anti-Corrosion Mirror Treatment
- Environmentally Sustainable
- Energy Efficient
- Proudly Made in The USA
- Patent Pending

### LIGHTING

- Low-Mercury T5HO Warm Fluorescent (US Made)
- CRI 85
- CCT (K) 3000
- Average Lamp Life of 35,000 Hours
- 50,000 Cycle Ballast

### OPTIONS

- Custom Sizes Available
- Add a TV (See Quantum Lighted Mirror TV)
- Add Keen™ Technology
- Add Vive™ Technology
- Diamond Clear™
- Dimmable
- Defogger
- Night Light
- Glass Shelf
- LED Digital Clock
- LED Lighting
- EnergyLite™
- Wall Glow

### SAFETY

- Tested to UL/UL-C 1598 Including Section 16.23
- International Certifications
- Safety Backed Mirror

### THERE'S ONLY ONE™ ELECTRIC MIRROR®

Electric Mirror is the global leader in Lighted Mirrors and Mirror TV technology. With unparalleled customer service and amazing innovation, Electric Mirror is the standard of luxury for five-star hotels, upscale commercial projects and designer homes.

**PROPRIETARY AND CONFIDENTIAL:** The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.


© 2014 ELECTRIC MIRROR®

## QUANTUM™ LIGHTED MIRROR

### SPECIFICATION

- The top of the lighted mirror above the bathroom vanity should be a minimum of 6' 6" above the finished floor.
- Electrical connections made with MC cable brought through the chassis knockout, no electrical box required.
- Electrical power should be controlled by a light switch.
- Fixture should be mounted to wall studs to provide sufficient support. Mounting holes are provided in the chassis.

| MODEL NUMBER    | DIMENSIONS  | POWER REQUIREMENTS                 | LAMPING       |
|-----------------|---|------------------------------------|---------------|
| QUA-24.00x40.00 | 24" W x 40" H x 1.75" D<br>610mm x 1,016mm x 44mm   | 120 - 277 VAC, .20 - .09 Amps, 24W | 1 x T5, 24W   |
| QUA-36.00x40.00 | 36" W x 40" H x 1.75" D<br>914mm x 1,016mm x 44mm   | 110 - 277 VAC, .35 - .14 Amps, 39W | 1 x T5HO, 39W |
| QUA-48.00x40.00 | 48" W x 40" H x 1.75" D<br>1,219mm x 1,016mm x 44mm | 110 - 277 VAC, .49 - .19 Amps, 54W | 1 x T5HO, 54W |
| QUA-60.00x40.00 | 60" W x 40" H x 1.75" D<br>1,524mm x 1,016mm x 44mm | 110 - 277 VAC, .73 - .29 Amps, 80W | 1 x T5HO, 80W |

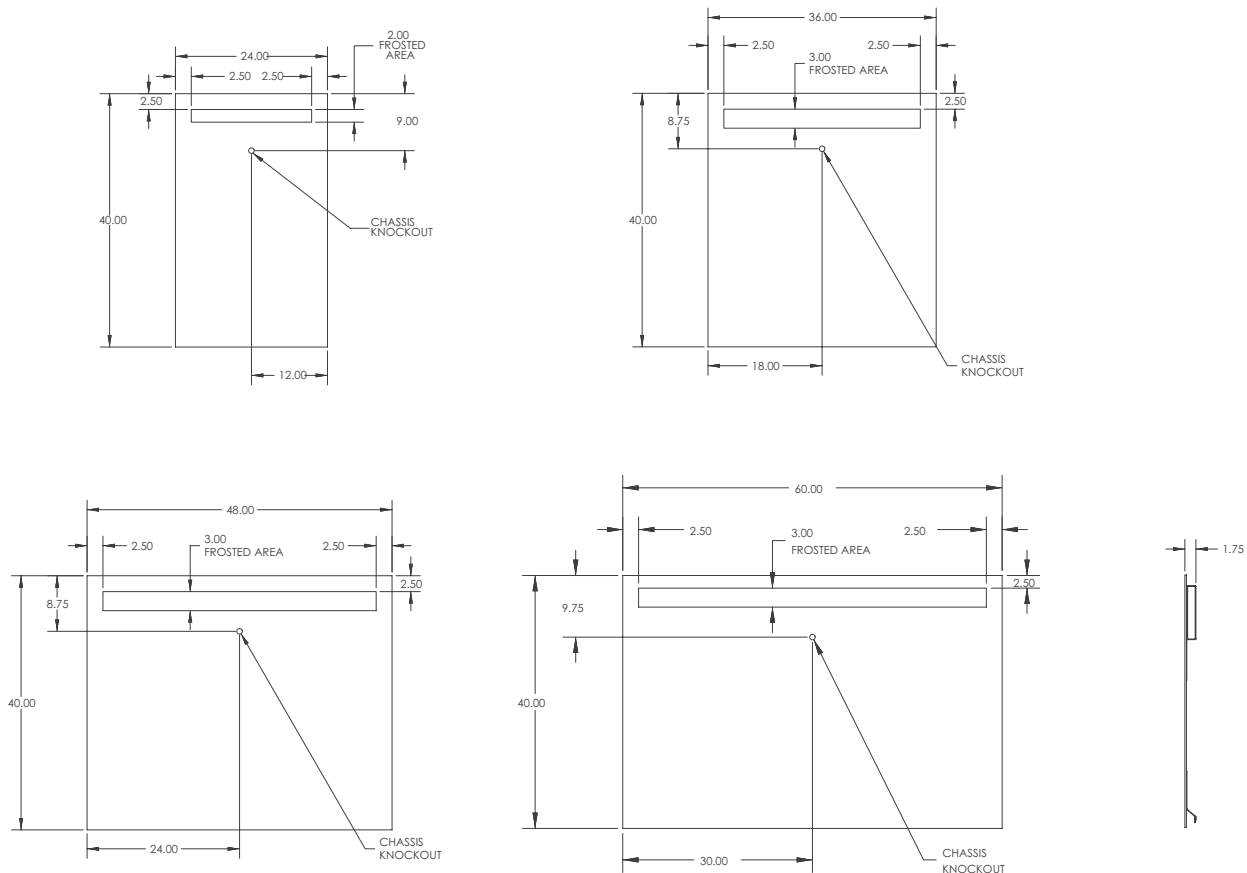

**PROPRIETARY AND CONFIDENTIAL:** The information contained in this specification is the sole property of Electric Mirror®. Any reproduction in part or in whole without written permission from Electric Mirror® is prohibited.

© 2014 ELECTRIC MIRROR®